
# WIND SITE SCREENING

Bruce County inland screening | desktop comparison

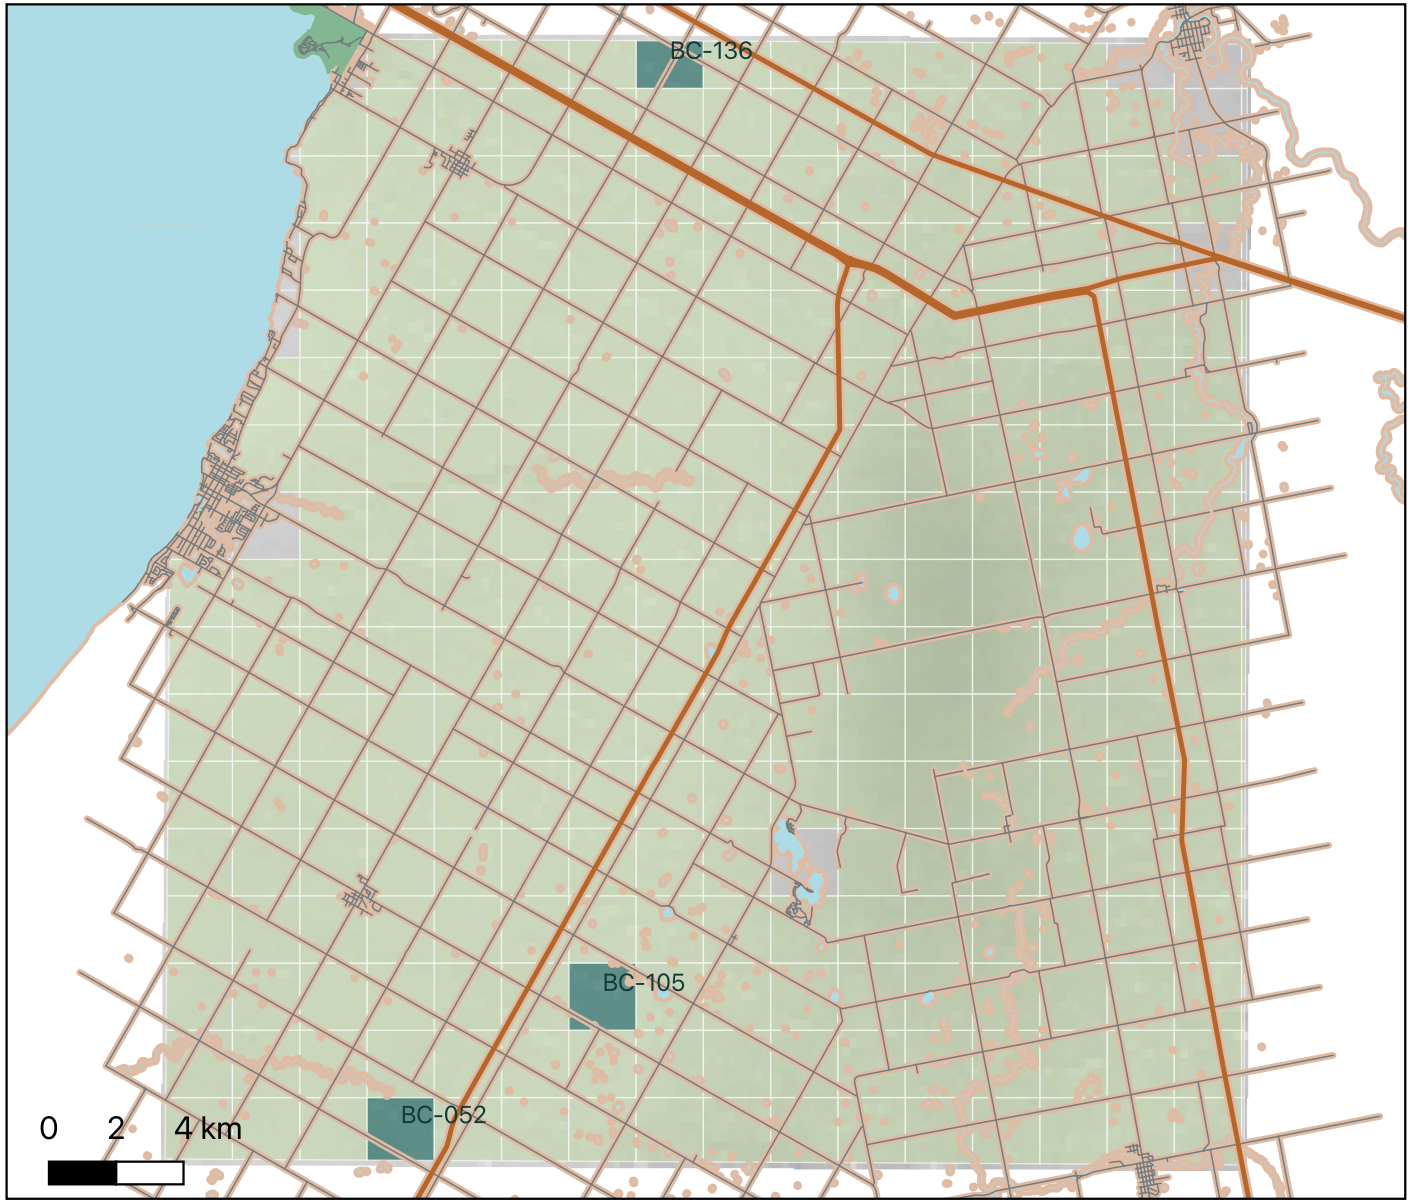


Grid north is up | EPSG:26917 (metres)

## Map key

Candidate areas

- Top 3 eligible areas
- Other eligible areas
- Excluded areas
- Mapped hydro lines (voltage unknown)
- Ontario roads
- Scenario setbacks
- Water bodies
- Regulated provincial parks

254 of 289 areas pass
the selected screening assumptions.

Score / 100
50% wind + 30% grid distance
+ 20% land outside setbacks.

Setbacks (m)
roads: 100
transmission: 150
water: 120
protected: 300

Study cells are not legal parcels. No grid capacity or approval implied.

Data: Ontario open data (OGL Ontario); GWA 4.0, DTU / World Bank / Vortex / ESMAP (CC BY 4.0).